


**TN-35F • TN-35F (P) 邦油 (A/Y/H型管)**  
 半自動高速繞線機 High Speed Cross Cone Winder (For Bonded yarn)

Max. 10000 r.p.m.  
 Max. 1600mm (800-1400mm/min)  
 TN-35F(P)-Y  
 Max. 4000 r.p.m.  
 Max. 1000mm (400-800mm/min)



外觀尺寸 | Dimension unit: mm

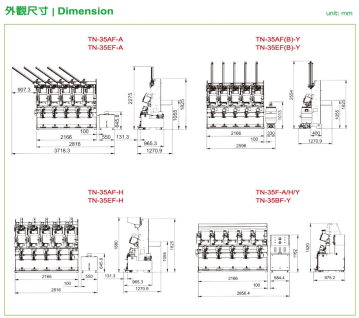

**規格 | Specifications**

型號 Package shape	TYPE - A	TYPE - Y	TYPE - Y	TYPE - Y	TYPE - H	TYPE - H			
型號 model	TN-35AF-A	TN-35EF-A	TN-35AF(P)-Y	TN-35EF(P)-Y	TN-35AFB(P)-Y	TN-35EFB(P)-Y	TN-35AF-H	TN-35EF-H	TN-35F-H
錐子角度 Taper angle	2° 20' - 9° 37'	0° - 2° 20'	0° - 2° 20'	0° - 2° 20'	0° - 2° 20'	0° - 2° 20'	0° - 2° 20'	0° - 2° 20'	0°
容量 Capacity	180 LBS/80m 40ZSP	280 LBS/80m 210D2 Nylon	340 LBS/80m 210D2 Nylon	140 LBS/80m 210D2 Nylon	100 LBS/80m 210D2 Nylon	2800-2900 PCS/80m 40Z 500M	240 LBS/80m 40ZSP	180 LBS/80m 40ZSP	180 mm
最大錐子半徑 Max. cone radius	110 mm	85 mm	80 mm	80 mm	80 mm	75 mm	150 mm	150 mm	150 mm
轉速 Rotation	3° - 4°	2° - 4°	3° - 4°	2° - 4°	3° - 4°	2° - 3°	3° - 6°	3° - 6°	3° - 6°
層數 No. of strands	5	5	5	5	5	4	4	4	4
最高速度 Spindle speed	Max. 10000 r.p.m.	Max. 10000 r.p.m.	Max. 10000 r.p.m.	Max. 4000 r.p.m.	Max. 4000 r.p.m.	Max. 10000 r.p.m. Max. 1000 r.p.m.	Max. 10000 r.p.m.	Max. 10000 r.p.m.	Max. 10000 r.p.m.
速度比 Cross ratio	2.5-4	2.5-4	2.5-4	2.5-4	2.5-4	2.5-4	2.5-4	2.5-4	2.5-4
最大尺寸 Maximum size	230L x 900 x 1600 (mm)	280L x 900 x 1600 (mm)	230L x 900 x 1600 (mm)	230L x 900 x 1600 (mm)	230L x 900 x 1600 (mm)	230L x 900 x 1600 (mm)	230L x 900 x 1600 (mm)	230L x 900 x 1600 (mm)	230L x 900 x 1600 (mm)
總重量 Weight	N.W. 900kg G.W. 1100 kg	N.W. 950kg G.W. 1100 kg	N.W. 950kg G.W. 1100 kg	N.W. 900kg G.W. 1100 kg	N.W. 900kg G.W. 1100 kg	N.W. 900kg G.W. 1100 kg	N.W. 900kg G.W. 1100 kg	N.W. 900kg G.W. 1100 kg	N.W. 900kg G.W. 1100 kg

所有規格均可能因產品改良而有所更改。 All specifications and designs subject to change without notice.

**MATERIAL PRODUCTS**

**TAINING**  
Professional Sewing Thread Winders.

**TN-35 Series**

A Cone

Y King Spool

H Spool

**FACTORY**  
**泰順機器工業股份有限公司**  
 TAINING MACHINE INDUSTRIAL CO., LTD.  
 420, Lane 104, Sec. 3, Taichung Rd., Taichung City 42501, Taiwan  
 TEL: 886-4-22295121 FAX: 886-4-22295123  
 E-mail: tainingsales@taining.net  
 www.taining.com.tw

**OFFICE**  
**蕭勝股份有限公司**  
 HAN W. S. CORPORATION  
 420, Lane 104, Sec. 3, Taichung Rd., Taichung City 42501, Taiwan  
 TEL: 886-4-22295121 FAX: 886-4-22295123  
 E-mail: tainingsales@taining.net  
 www.taining.com.tw

CE  
 ISO 9001

5 Spindles