

TN-35 (A/Y/H型管) • TN-35(B) Y型管 (邦迪)
半自動高速繞線機 High Speed Cross Cone Winder (For Bonded yarn)

Max. 10000 r.p.m.
Max. 1000~1600 m/min
Max. 4000 r.p.m. (TN-35B-Y)




多功能微電腦控制面板
Micro processor controller



外觀尺寸 | Dimension

unit: cm

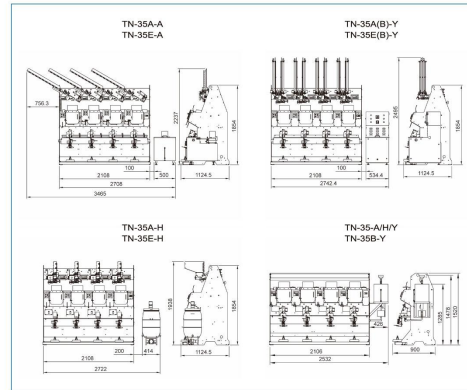

規格 | Specifications

成型 Package shape	1 2 3			1 2 3 4			1 2 3 4			1 2 3		
	TYPE - A			TYPE - Y			TYPE - Y			TYPE - H		
型號 model	TN-35A-A	TN-35E-A	TN-35-A	TN-35A-Y	TN-35E-Y	TN-35-Y	TN-35AB-Y	TN-35EB-Y	TN-35B-Y	TN-35A-H	TN-35E-H	TN-35-H
管子角度 Taper angle	2° 20' ~ 5° 57'			0° ~ 2° 20'			0° ~ 2° 20'			0°		
產量 Capacity	150 LBS/8hrs 40ZSP			250 LBS/8hrs 210D2 Nylon			210 LBS/8hrs 210D2 Nylon			125 LBS/8hrs 210D2 Nylon		
最大線圈外徑 Max. outer Ø	160 mm			86 mm			115 mm			86 mm		
橫動量 Traverse	3" ~ 6"			2" ~ 4"			2" ~ 6"			2" ~ 4"		
錠數 No. of spindles	4			4			4			4		
主轉速度 Spindle speed	Max. 12000 r.p.m.			Max. 10000 r.p.m.			Max. 12000 r.p.m.			Max. 10000 r.p.m.		
線速度 Yarn speed	Max. 1600 m/min			Max. 1600 m/min			Max. 1000 m/min			Max. 1600 m/min		
花紋比例 Cross ratio	2-4			2-4			3-4			2-4		
包裝尺寸 Measurement	225L x 143W x 210H (cm)			225Lx105Wx175H (cm)			225L x 143W x 210H (cm)			225L x 143W x 210H (cm)		
機器重量 Weight	N.W: 1100kgs G.W: 1400 kgs			N.W:750kgs G.W:900kgs			N.W: 1100kgs G.W: 1400 kgs			N.W:750kgs G.W:900kgs		

機體設計及規格如有變更恕不另行通知 All specifications and designs subject to change without notice.

MATERIAL PRODUCTS



TAINING

Professional Sewing Thread Winders.

TN-35 Series



A Cone

Y King Spool

H Spool



FACTORY
泰能機器工業股份有限公司
TAINING MACHINE INDUSTRIAL CO., LTD.
台灣台中縣太平鎮中興路三段734B-313號
35, Lane 734, Sec 3, Sha Tien Rd., Dada,
Taichung Hsien, 412 Taiwan.
TEL: 886-4-2699-1313 FAX: 886-4-2699-0533
E-mail: taining@ms14.hinet.net
http://www.taining.tw
www.winder.com.tw

OFFICE
盈能股份有限公司
INWIN W & R CORPORATION
103, Yu Han Rd., Taichung 404, Taiwan
TEL: 886-4-2301-0980
FAX: 886-4-2301-2297
E-mail: taining_inwin@gmail.com



4 Spindle

S E W I N G T H R E A D W I N D E R S